



NV-520G

Industrial 4 Giga LAN Over VDSL2 Extender with DIP Switch

Netsys' NV-520G is a VDSL2 port with 4 x10/100/1000Mbps ethernet ports. That provide an end to end solution for industrial applications.

NV-520G support high bandwidth up to 160Mbps symmetric and long reach transmission up to 3km, and also supports both Master and Slave modes selectable by DIP Switch.

NV-520G's DIN-Rail and Power redundancy features offer quick, easy, safety wide range and high performance broadband / Triper play services to industrial environments such as Factory, MRT, Train station, Ticket vending machine, Parking system, Weather station, Military Training system, Monitoring system, Farm, Jail, Refinery, Passenger shipetc.

Features


- Supports high bandwidth up to 160Mbps symmetric over Line ports
- Support long reach transmission up to 3 km with 24 gauge phone wire
- Support auto speed and 8 profiles mode selectable by DIP switch
- Master and Slave mode selectable by DIP switch
- Supports Jumbo frame up to 2k bytes
- Built in Surge protector
- Support power redundant and wide range dual power input(DC15V ~ 48V)
- Supports Overload Current Protection
- Supports wide range operating temperature(-20°C~ 70°C)
- Supports Reverse Polarity Protection
- Supports alarm contact (relay output - 1 A @ 24 VDC)
- Supports DIN-Rail mount installation
- Metal case design and compliant with IP30 standard

Specifications

Standard	IEEE802.3/802.3u/802.3ab Ethernet standard G993.2 VDSL2 standards
Physical Interface	4 x RJ-45 10/100/1000Mbps Ethernet port 1 x RJ-11/Terminal Block connector for VDSL2 line port 1 x DIP Switch 1 x removable 6-contact terminal blocks for power1 and alarm contact 1 x removable 2-contact terminal blocks for power2
LED Indicators	1 x Power LED 4 x Link/Active Status for Ethernet port 1 x Link/Speed LED for VDSL2 port 1 x CO Mode indicator LED 1 x CPE Mode indicator LED
VDSL2 Line Code	DMT modulation

VDSL2 Transmission Mode	Packet Transfer Mode (PTM)
Typical Power Consumption	6W
Power Input	Input Voltage: 15V to 48VDC Input Current: 0.5A or above
EMC	EMI Compliant: FCC class A EMS Compliant: CE mark
Operating Temperature	-20°C~ 70°C (-4°F ~ 158°F) Fanless, free air cooling
Storage Temperature	-40°C~ 70°C (-40°F ~ 158°F)
Humidity	5 to 95% (non-condensing)
Dimensions	171mm x 121mm x 35mm (6.7" x 4.76" x 1.37")

Application

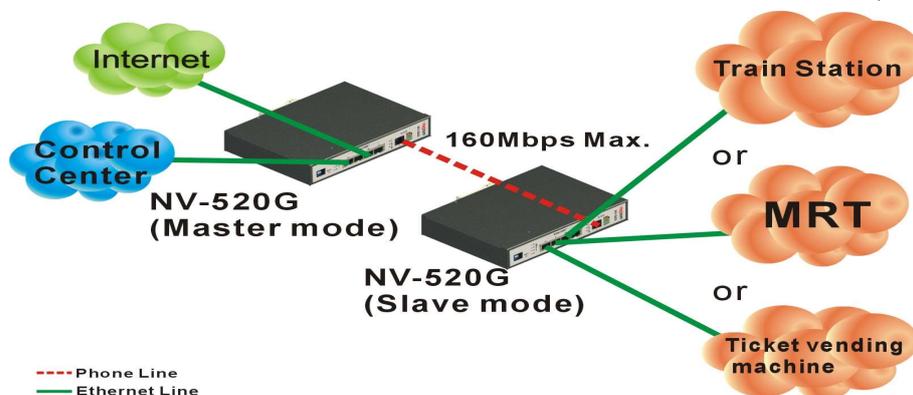

Order Information

NV-520G(Industrial 4 Giga LAN Over VDSL2 Extender with DIP Switch)

For more product information, visit us on the web www.netsys.com.tw

sales@netsys.com.tw

*Netsys reserves the right to change specifications without prior notice



NV-520G

www.netsys.com.tw